

# Product Highlight

## Thermowire



[Click here to watch the video](#)



### Lifetime Warranty

Our Underfloor Heating is manufactured in the United Kingdom and is the only system on the market that offers a Lifetime Warranty.

## Undertile heating

The thin profile of Thermowire means that it can be installed in the layer of tile glue therefore not adding any additional height to your floor build up. It can also be covered with a layer of self-levelling compound to allow it to be used in conjunction with other floor finishes.

## Rapid heat up time

With the Thermowire cable installed directly below the tiles you will experience rapid warmth to your floors.



## Twisted Twin Cable

The unique design of the cable minimises the likelihood of damage, hence the lifetime warranty.

It also ensures zero electromagnetic field, the system is EMF free.

## Fully Waterproof -

## Safe for use in the shower

Cable is IP68 Rated - Fully Waterproof



- Use in Shower to dry floor to:
  - Reduce slip hazard
  - Reduce the likelihood of mold buildup & grout decolouring



## Variable output Underfloor Heating

The cable system allows you to space the heating cables yourself to achieve a desired layout and heat output per m<sup>2</sup>. For larger areas directly undertile we would recommend an output of 150W/m<sup>2</sup> and for bathrooms, either above or below the screed, we would recommend an output of 200W/m<sup>2</sup>. Ideal for irregular shaped areas.

The layout is totally flexible and can be designed to fit around furniture and fixtures in small or irregular shaped rooms.

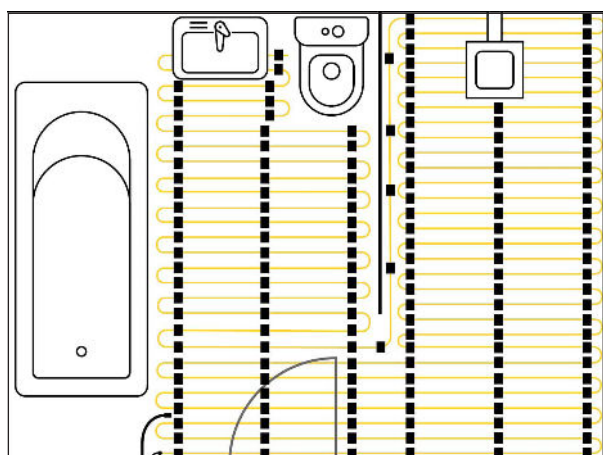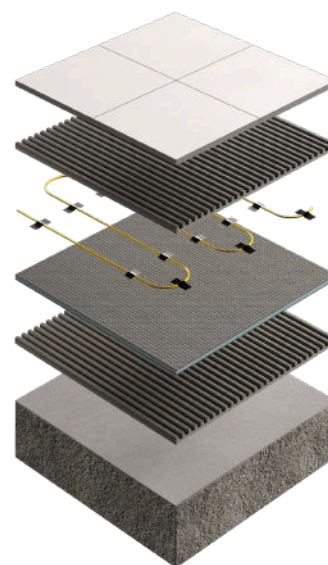

Thermowire loose wire systems are supplied with a roll of cloth tape for taping the cable to the substrate. We mark the ½ way point of the cable to help the installer to ensure he is on track with his spacing of the cable and Thermowire features a 5metre cold tail to ensure an easier install.